

# COD LED DOWNLIGHT




## FEATURES

- Recessed downlight ideal for residential and commercial applications.
- Choice of 3000K (warm white) or 4000K (natural white)
- Integral LED driver.
- Common cut-out sizes ideal for retro-fitting
- IC rated - can be abutted and covered with thermal insulation.

## SPECIFICATIONS

Model	LE93	LE94	LE153	LE154	LE203	LE204
System Power	8 W	8 W	13 W	13 W	19 W	19 W
Luminous Flux	750 lm	750 lm	1250 lm	1250 lm	1900 lm	1900 lm
Colour Temperature	3000 K	4000 K	3000 K	4000 K	3000 K	4000 K
Colour Rendering	$R_a > 80$					
Beam Angle	95°					
Life (L70)	25,000 hours					
Driver	Integral					
Dimmable	No					
Input Voltage	220 - 240 VAC 50/60Hz					
Environmental Protection	IP20					
Operating Temperature	-20°C to +45°C					
Cutout	Ø 90 - 102 mm		Ø 145 - 155 mm		Ø 195 - 210 mm	

## DIMENSIONS (MILLIMETRES)

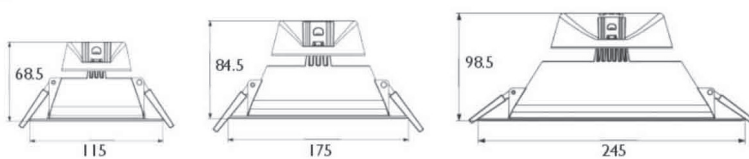

LE93/LE94

LE153/LE154

LE203/LE204

