

DORY LED UTILITY




FEATURES

- Compact utility light ideal for general purpose illumination applications, car parks, or stairwells
- Integral LED driver
- Optional integral microwave multi-sensor with 3-stage dimming function
- Aluminium body with polycarbonate diffused lens
- Tough IK08 housing
- IP65 rated for outdoor and damp applications

SPECIFICATIONS

Model	LU30	LU30-MS
System Power	30W	28W
Luminous Flux	2850 lm	2500 lm
Colour Temperature	4000 K	
Colour Rendering	$R_a > 80$	
Beam Angle	140°	
Life (L70)	30,000 hours	
Driver	Integral	
Dimmable	No	Via integral multi-sensor
Input Voltage	100 - 240 VAC 50/60 Hz	
Environmental Protection	IP65 / IK08	
Operating Temperature	-20°C to +50°C	
Dimensions	315x315x80mm	315x315x100mm
Weight	2.2 kg	2.2 kg

DIMENSIONS (MILLIMETRES)

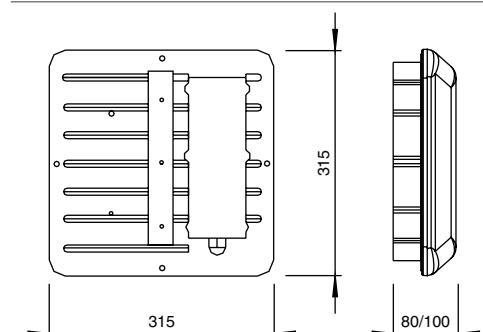

Web: www.eoi.net.au
 Email: info@eoi.net.au

LED	2850 LUMEN	30W TOTAL	4000K	IP65	IK08	35,000 HOURS
-----	------------	-----------	-------	------	------	--------------

Please note data is subject to change without notice. R0616.1